

First name: \_\_\_\_\_

Last name: \_\_\_\_\_

Student ID: \_\_\_\_\_

Signature: \_\_\_\_\_

**Read before you start:**

- There are four questions.
- The examination is closed-book.
- No computer/calculator is allowed.
- The duration of the examination is 100 minutes.
- Besides correctness, the CLARITY of your presentation will also be graded.

Q1	Q2	Q3	Q4	Total

Consider the optimization problem

$$V_N(x) = \min_{u_0, \dots, u_{N-1}} x_N^T H x_N + \sum_{k=0}^{N-1} x_k^T Q x_k + u_k^T R u_k$$

subject to  $\begin{cases} x_0 = x \\ x_{k+1} = Ax_k + Bu_k \end{cases}$

where  $x_k \in \mathbb{R}^n$ ,  $u_k \in \mathbb{R}^m$ , the symmetric positive definite matrices  $H$ ,  $Q$ ,  $R$  are of appropriate dimensions, and  $N \geq 0$  is an integer.

- (a) Write the recursive relation that allows one to compute  $Q_{N+1}$  from  $Q_N$  where  $V_N(x) = x^T Q_N x$ . What does  $Q_0$  equal?

*For the remainder of the question consider the scalar case with  $A = B = Q = H = 1$  and  $R = r$ .*


- (b) Compute the limit  $\lim_{N \rightarrow \infty} V_N(x)$  in terms of  $r$  and  $x$ .
- (c) Take  $r = 3/4$  and  $N = \infty$ . Compute the optimal control sequence  $(u_0^*, u_1^*, \dots)$  in terms of  $x$ .

Consider the first-order LTI system  $\dot{x} = u$  and the associated optimization problem

$$J^*(t_0, x(t_0)) = \min_{u(\cdot)} \int_{t_0}^{\infty} (qx(t)^2 + ru(t)^2) dt$$

where  $q$  and  $r$  are positive constants.

- (a) Show that the candidate function  $V(t, x) = cx^2$  (where  $c$  is a constant) satisfies the HJB equation for some  $c$ . What is this  $c$ ?
- (b) Find the optimal trajectory  $x^*(t)$  for  $t_0 = 1$  and  $x(1) = 7$ .

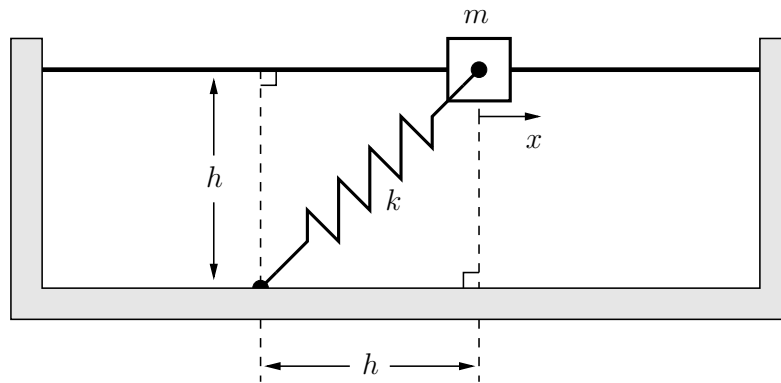

Consider the frictionless mass-spring system shown at rest in the figure. The mass  $m$ , connected to the spring with spring constant  $k$ , is allowed to slide (horizontally) through the bar, where the displacement from the equilibrium is denoted by  $x$ . Obtain the dynamics of this system using the Euler-Lagrange equation.

The system

$$\begin{aligned}\dot{x}_1 &= x_2 \\ \dot{x}_2 &= -x_1 + x_2(1 - x_1^2) + u\end{aligned}$$

under the constraint  $|u| \leq 1$ , is to be controlled to minimize the performance measure

$$J = \int_0^1 [2x_1(t)^2 + x_2(t)^2 + u(t)^2] dt.$$

The initial and final state values are specified.

- (a) Determine the costate equation for the system.
- (b) Determine the optimal control  $u^*(t)$  (in terms of the optimal state and/or optimal costate solutions).